


Chemically Treated PET Layer

PET Core Layer

Pealable PET Layer

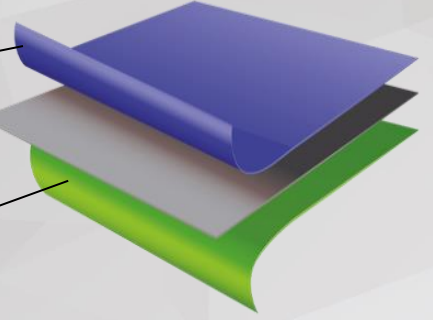

SUPCOAT

BT 7011 PPL

Description

SUPCOAT BT 7011 PPL is a transparent biaxially oriented polyester (BOPET) film with peelable seal property. Other side is treated.

Please contact with our sales department for other available thicknesses.

Properties

- Peelable seal to PP
- Superior mechanical strength
- Excellent stiffness
- Excellent machinability and flatness
- Good dimensional stability
- Excellent chemical resistance
- Easy open peelable seals
- The film shelf life is 6 months

Applications

It is specially designed for use in lidding applications where peelable seal property is needed to substrates like PP.

Treated side may be used as printing surface, but should be approved with present ink and glue systems used including aging tests.

Please contact customer service representative for the application compliance.

Technical Features

PROPERTIES	TEST METHOD	UNITS		BT 7011 PPL			
THICKNESS	ASTM F2251	micron		23	27	40	54
		Gauge		92	108	160	216
YIELD	ASTM D4321	m²/kg		32,7	27,6	18,4	13,5
		in²/Lbs		23.000	19.400	12.900	9.500
UNIT WEIGHT	ASTM D4321	g/m²		30,6	36,3	54,4	74,0
HAZE	ASTM D1003	%		20			
GLOSS (45 °)	ASTM D2457	%		75			
OXYGEN TRANSMISSION RATE (23°C-0%RH)	ASTM D3985	cc/m²/24hrs		≤ 100			
		cc/100in²/24hrs		≤ 6,5			
WATER VAPOUR TRANSMISSION RATE (38°C-90%RH)	ASTM F1249	g/m²/24hrs		≤ 30			
		g/100in²/24hrs		≤ 2			
TENSILE STRENGTH AT BREAK	ASTM D882	MD	N/mm²	240			
			lb/in²	34.800			
		TD	N/mm²	260			
			lb/in²	37.700			
ELONGATION AT BREAK	ASTM D882	MD	%	140			
		TD		110			
THERMAL SHRINKAGE (150 °C, 30 min, air)	ASTM D1204	MD	%	2,0			
		TD		0,5			
COEFFICIENT OF FRICTION	ASTM D1894	Coated Side/Metal		0,45			
		Other Side/Metal		0,40			
SURFACE TENSION	ASTM D2578	Dyne/cm	Chemical Side	38			
			Other Side	-			
HEATSEAL RANGE	ASTM F88	°C		160-240			
		°F		320-464			
HEATSEAL STRENGTH to PP (190 °C, 4 MPa, 1 s)	Internal	N/15mm		5,0			

Product Identification (Decision 97/129/EC): PET1

Regulatory Status

Our product complies with the applicable EC legislation on packaging involving direct contact with foods except metallized films. Full details are given on the Regulatory Compliance Certificate and can be found on our web site.

The information contained in this data sheet is true and accurate according to current state of our knowledge and intended to give general information on our products and their applications. Above values are to be considered as guidelines and not as product specifications. Since the actual conditions of use are beyond our control, users are advised to make their own tests at their specific conditions of laboratory and/or actual use. We suggest our customers to determine final suitability for their specific end uses.

Also be advised that information on this data sheet shall not be construed as an inducement or recommendation to use any process or to manufacture or use any product in conflict with existing, pending or future patents. The film shelf life is 6 months. Modified PU based ink series offer good adhesion and printability.

For related spec sheet with tolerance values, please contact our sales departments

STANDARD ROLL DIMENSIONS			
CORE INNER DIAMETER (ID)	CORE OUTER DIAMETER (OD)	LENGTH TOLERANCE	WIDTH TOLERANCE
76 mm (3 in) & 152 mm (6 in)	530 mm & 790 mm	± % 10 for all OD's	- 0 & + 4 mm



SUPER FILM
PACKAGING FILMS

REV: 02 Date: 20.03.2025



Factory & Head Office
Başpınar (Organize) OSB Mahallesi O.S.B
2. Bölge Hacı Sani Konukoğlu Bulvarı No:1
P +90 342 211 60 00 (20 lines) F +90 342 337 28 70

Superfilm Europe S.A
Esplanade de la Moselle 90,
Wasserbillig, Luxembourg
P +352 261 19 922 F+352 261 19 921

www.superfilm.com